

ALPHA[®] HIFLO[®] SMG

Wave Solder Metal

DESCRIPTION

ALPHA HiFlo SMG is manufactured using ultra high purity raw materials and the alloy is conditioned using Alpha's proprietary viscosity and dross lowering treatments. This results in a pure, low drossing, high fluidity solder alloy, which is free of cast-in impurities and included oxides. Characteristics include very low dross, reduced skips, bridges and icling and fine pitch soldering. Ideal for densely populated boards, it enables increased production speeds and yield improvements, reduces solder pot maintenance.

READ ENTIRE TECHNICAL DATA SHEET BEFORE USING THIS PRODUCT

FEATURES & BENEFITS

- Increases Production Speed: which means lower product cost.
- Minimises Drossing: lowers downtime for maintenance and reduced solder consumption and cost.
- Reduces Bridging: lower amount of rework to higher yield, lowers cost and reduces chances of defects getting to consumer.
- Solders Densely Populated Boards: can be used on all your applications, you only need to stock one grade.
- Solders at a Lower Temperature: lower temperatures mean less oxide production and hence lower solder usage and cost.

APPLICATION GUIDELINES

ALPHA HiFlo SMG is the ideal companion product for all wave soldering systems including inert atmosphere equipment. HiFlo SMG is ideal for the following types of applications:

- High volume wave soldering processes.
- Applications requiring dual wave and chip wave systems.
- Boards that are densely populated.
- Fine pitch soldering.

A solder pot temperature of 240 to 250 °C is recommended. For suitable wave solder fluxes, please see our selector guide. Reclaim services including dedicated containers are also available. Please consult your local sales office.



AVAILABILITY

ALPHA HiFlo SMG is available in 3.5 kg feeder bars, 1 kg bars, and solder chunks for first fill of solder baths.


DIMENSIONS OF BARS

All dimensions in mm.

1 kg

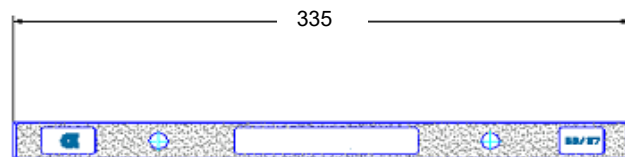

3.5 kg

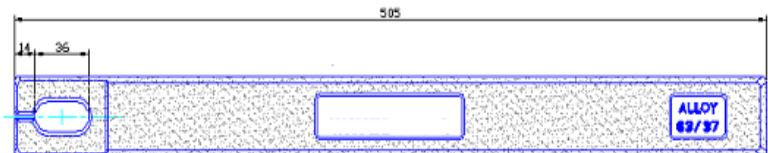

TECHNICAL SPECIFICATION

The following indicates the alloy and impurity limits for Hiflo SMG in relation to J-STD-006C, ISO9453, and JIS Z3282.

Element	Hiflo SMG	ISO9453 Sn63Pb37E	J-STD-006C	JIS Z3282 H63E
Sn	62.5 to 63.5	62.5 to 63.5	62.5 to 63.5	62.5 to 63.5
Pb	Balance	Balance	Balance	Balance
Sb	0.05 max	0.05 max	0.20 max	0.05 max
Cu	0.007 max	0.08 max	0.08 max	0.08 max
Zn	0.001 max	0.001 max	0.003 max	0.001 max
Fe	0.005 max	0.02 max	0.02 max	0.02 max

Element	Hiflo SMG	ISO9453 Sn63Pb37E	J-STD-006C	JIS Z3282 H63E
As	0.008 max	0.03 max	0.03 max	0.03 max
Ni	0.002 max	0.01 max	0.01 max	0.01 max
Bi	0.01 max	0.05 max	0.10 max	0.05 max
Cd	0.001 max	0.002 max	0.002 max	0.002 max
Ag	0.005 max	0.10 max	0.10 max	0.10 max
Al	0.001 max	0.001 max	0.005 max	0.001 max
In	0.02 max	0.10 max	0.10 max	0.10 max
Au	0.01 max	0.05 max	0.05 max	0.05 max

All figures are %

1. ISO 9453: 2006

Soft Soldering Alloys – chemical composition and form. ISO – International Standards Organization, a network of national standards institutes working in partnership.

2. J-STD-006C: July 2013

Requirements for Electronic Grade Solder alloys and non-fluxed solders. Joint Industry Standards between IPC and Electronic Industries Alliance (US Based). IPC formed in 1957 as an Institute of Printed Circuits, J-STD-006C supersedes J-STD-006B.

3. JIS Z3282: 2006

Soft solders chemical composition and forms. JIS – Japanese Industrial Standards.

SAFETY & WARNING

It is recommended that the company/operator read and review the Safety Data Sheets for the appropriate health and safety warnings before use. **Safety Data Sheets are available at AlphaAssembly.com**

CONTACT INFORMATION

**To confirm this document is the most recent version, please contact
Assembly@MacDermidAlpha.com**

www.macdermidalpha.com

North America 300 Atrium Drive Somerset, NJ 08873, USA 800.367.5460	Europe Unit 2, Genesis Business Park Albert Drive Woking, Surrey, GU21 5RW, UK 01483.758400	Asia 8/F., Paul Y. Centre 51 Hung To Road Kwun Tong, Kowloon, Hong Kong 852.3190.3100
---	--	--

Also read carefully warning and safety information on the Safety Data Sheet. This data sheet contains technical information required for safe and economical operation of this product. READ IT THOROUGHLY PRIOR TO PRODUCT USE. Emergency safety directory assistance: US 1 202 464 2554, Europe + 44 1235 239 670, Asia + 65 3158 1074, Brazil 0800 707 7022 and 0800 172 020, Mexico 01800 002 1400 and (55) 5559 1588

DISCLAIMER: All statements, technical information and recommendations contained herein are based on tests we believe to be reliable, but the accuracy or completeness thereof is not guaranteed. No statement or recommendation shall constitute a representation unless set forth in an agreement signed by officers of seller and manufacturer. NO WARRANTY OF MERCHANTABILITY, WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY IS MADE. The following warranty is made in lieu of such warranties and all other warranties, express, implied, or statutory. Products are warranted to be free from defects in material and workmanship at the time sold. The sole obligation of seller and manufacturer under this warranty shall be to replace any noncompliant product at the time sold. Under no circumstances shall manufacturer or seller be liable for any loss, damage or expense, direct, indirect, incidental or consequential, arising out of the inability to use the product. Notwithstanding the foregoing, if products are supplied in response to a customer request that specifies operating parameters beyond those stated above, or if products are used under conditions exceeding said parameters, the customer by acceptance or use thereof assumes all risk of product failure and of all direct, indirect, incidental and consequential damages that may result from use of the products under such conditions, and agrees to exonerate, indemnify, defend and hold harmless MacDermid, Incorporated and its affiliates therefrom. No suggestion for product use nor anything contained herein shall be construed as a recommendation to use any product in a manner that infringes any patent or other intellectual property rights, and seller and manufacturer assume no responsibility or liability for any such infringement.

© 2019 MacDermid, Inc. and its group of companies. All rights reserved. "(R)" and "TM" are registered trademarks or trademarks of MacDermid, Inc. and its group of companies in the United States and/or other countries.